



# Nickel Plated F-Type Module, 25 PK

## PRODUCT SPECIFICATION

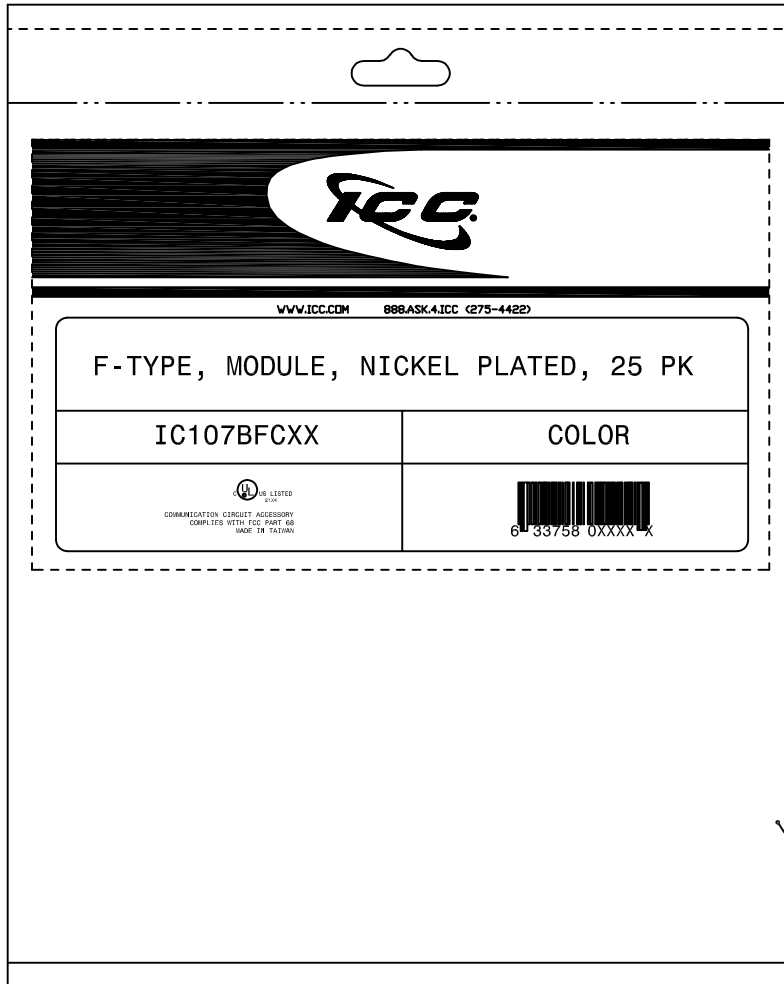

### Package includes:

- A. Nickel Plated F-Type Module, 25 pcs
- B. Packaging Bag, 1 pc



25X Nickel Plated  
F-Type Module

Packaging Bag

### Features and Benefits:

- Used for audio and video applications
- Rear threaded F-Type connectors for secure in-wall connections with both RG6 and RG59 coaxial cables
- Provides a clean and neat appearance installation
- Compatible with all IC107 faceplates, inserts, surface mount boxes, and blank patch panels
- Compatible with all IC108 furniture faceplates, bezels, and surface mount boxes
- Available in white
- 25 modules included in packaging bag
- ANSI/TIA-568-C and UL 1863 compliant


### MODULE, F-TYPE, NICKEL PLATED, 25 PK

|          |            |
|----------|------------|
| ITEM NO. | IC107BFCXX |
| DWG NO.  | PS107BFC00 |

|          |   |
|----------|---|
| REV.     | F |
| PAGE NO. | 1 |



CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 \* www.icc.com

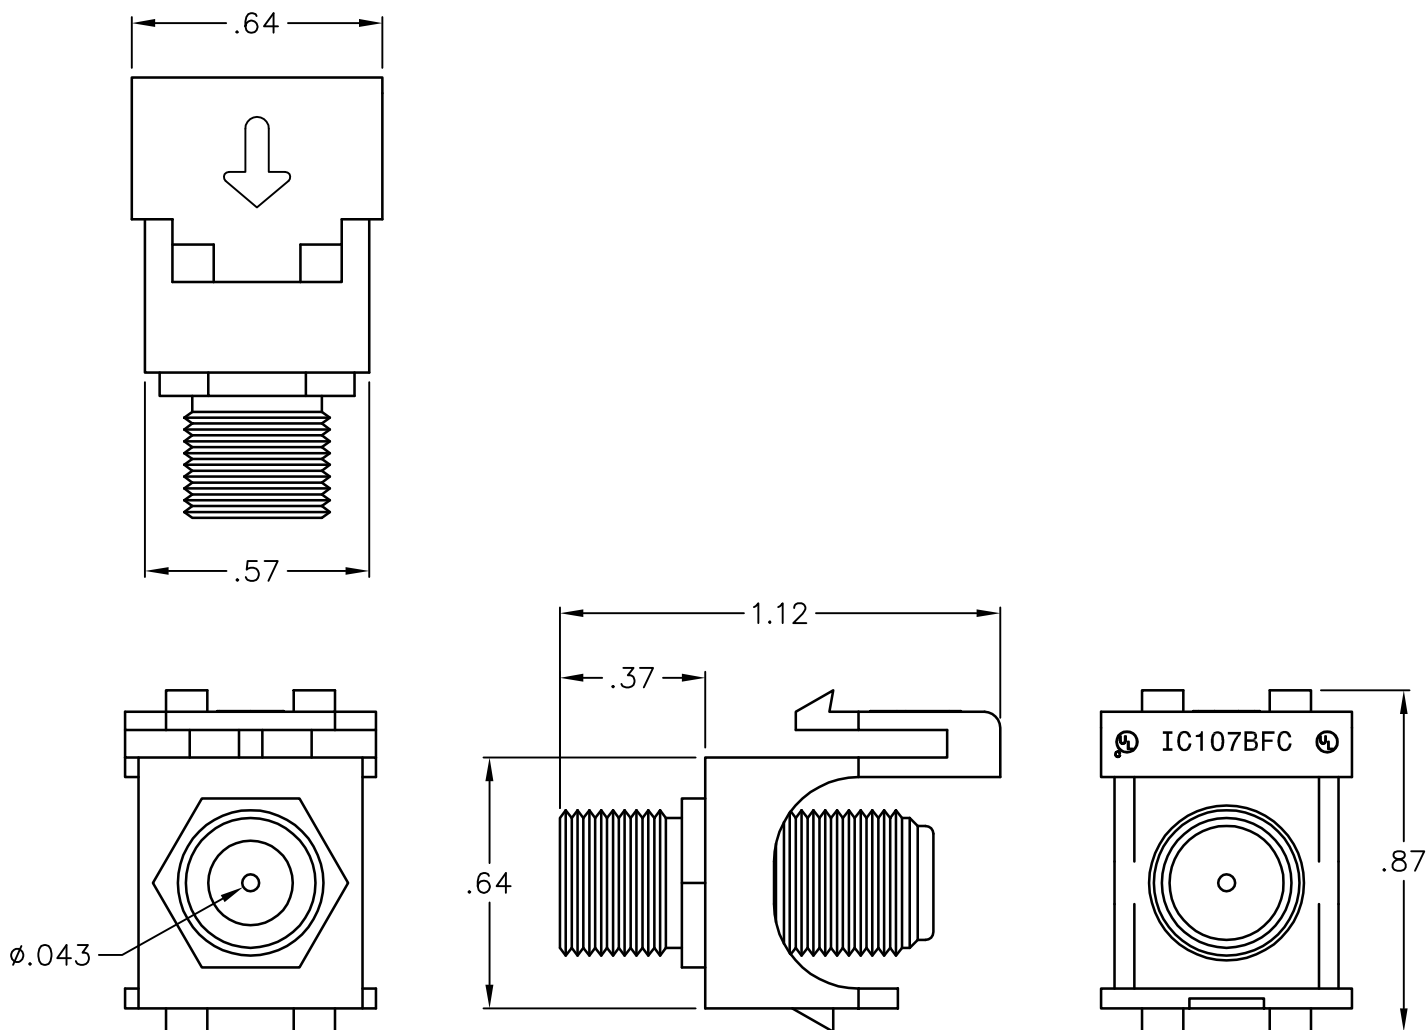

**NOTE: UNLESS OTHERWISE SPECIFIED**

**1. HOUSING:**

- A. MATERIAL: ABS, UL 94V-0
- B. COLOR: XX: WH-WHITE

**2. NICKEL PLATED F-TYPE CONNECTOR:**

- A. MATERIAL: BRONZE WITH NICKEL PLATING
- B. HOLDING FORCE > 80 GRAMS
- C. F-TYPE CONNECTOR THREADS: 3/8-32 UNEF-2A

**3. ELECTRICAL:**

- A. RETURN LOSS OF -20 dB MAX
- B. FREQUENCY RANGE 1.4 ~ 1.7 GHZ
- C. CONTACT RESISTANCE < 10 MOHM
- D. CHARACTER IMPEDANCE RATED 75 OHM
- E. INSULATION RESISTANCE > 10 MOHM

UL US FILE NO. 125268

**MODULE, F-TYPE, NICKEL PLATED, 25 PK**

ITEM NO. IC107BFCXX

REV. F

DWG NO. PS107BFC00

PAGE NO. 2

**ICC**  
Premium Products  
Proven Performance  
Competitive Prices

CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 2100 E. Valencia Dr, Suite D, Fullerton, CA 92831 \* www.icc.com