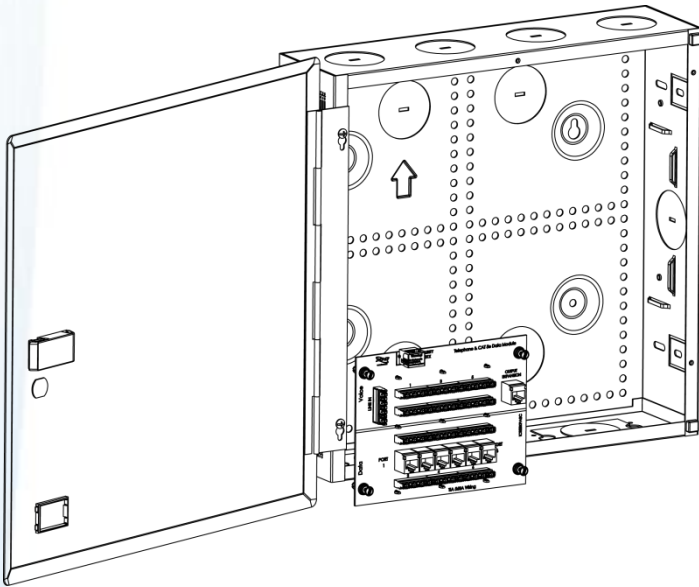# Combo, Net Media Center 14", 6-Port Voice & Data
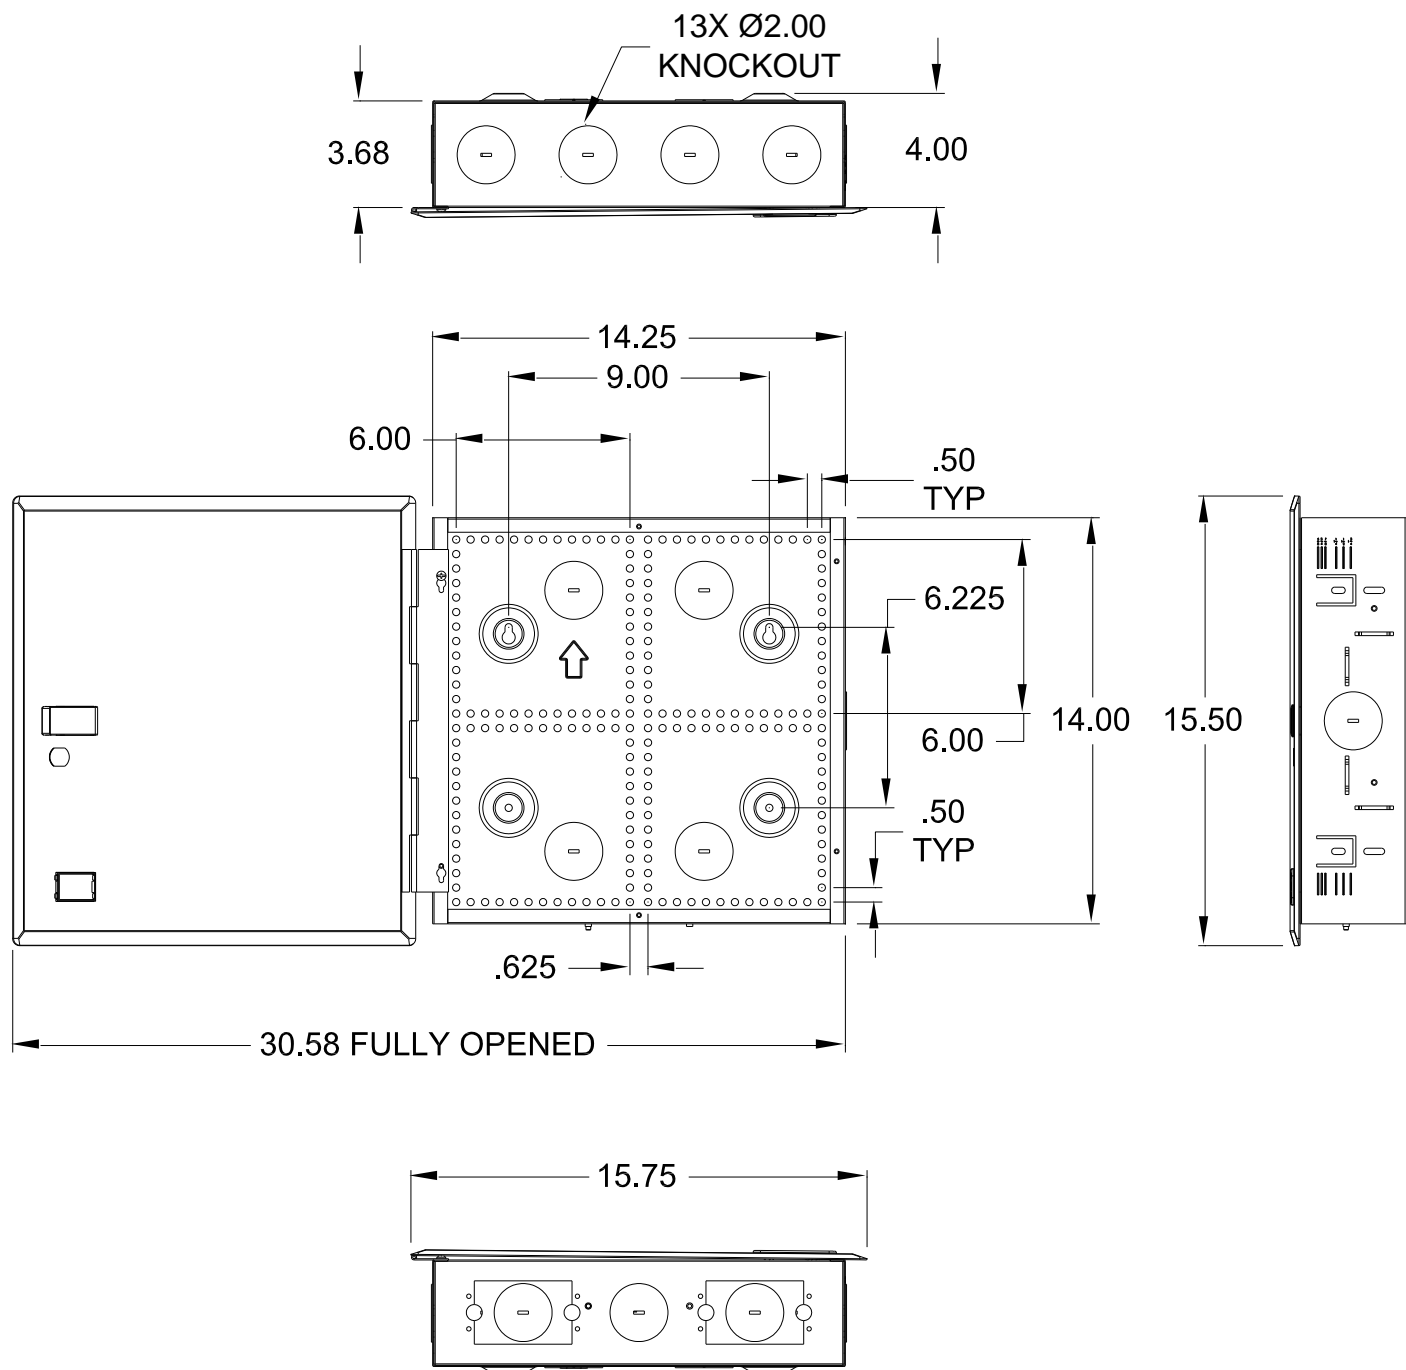
## Package Includes:

**A.** 14" Net Media Center Box Assembly, **1 Piece**

**B.** 14" Net Media Center Door, **1 Piece**

**C.** 6-Port CAT 5e Data & 6-Port Telephone Module w/RJ31x, **1 Piece**

**D.** #10-24 x 1", Wood Screw, **4 Pieces**

**E.** Wiring Location Sheet, **1 Sheet**

**F.** Protective Cover, **1 Piece**

## Features and Benefits

- Designed to serve as the central distribution point for voice, data, video, audio, and security services
- Allows for internal modules to be mounted horizontally or vertically
- Works with connectivity modules with push and pull fasteners
- Snap-in system enables users to quickly insert or move the modules
- 8 internal module mounting spaces
- 20-gauge steel construction, white powder coated, lightweight, and sturdy
- Fits between 16" studs or can be wall mounted
- Depth mark on the enclosure simplifies adjustment for drywall depths (1¾", 1½", 1¼", 7/8", ¾," 5/8").
- Enclosure combos are not designed to be installed in firewall applications
- Complies with UL 1863, TIA-568-C, TIA-570-B, and TIA-607 standards
- The door is reversible, designed with a latch for opening, and has a knockout for an optional padlock
- Can hold up to 6 cable management rings for routing cable

Part No: ICRESDC14W
Rev: A

**I** 888-ASK-4ICC icc.com csr@icc.com **I**

13X Ø2.00
KNOCKOUT

3.68          4.00

14.25
9.00
6.00
.50 TYP
6.225
14.00   15.50
6.00
.50 TYP
.625
30.58 FULLY OPENED

15.75

**NOTE: UNLESS OTHERWISE SPECIFIED**

A. Material: 20 GA CRS

B. Surface Finish: White Powder Coat

Part No: ICRESDC14W
Rev: A
Page 2 of 3

I    888-ASK-4ICC    icc.com    csr@icc.com    I

## NOTE: UNLESS OTHERWISE SPECIFIED

**1.** 6-Port CAT 5e Data & 6-Port Telephone Module with RJ31X Jack:

    **A.** PCB: Glass Epoxy FR4 Copper Clad, t=1.20mm

    **B.** 110 Block:

       1.     Housing: PC, UL 94V-0

       2.     IDC: Phosphorous Bronze, Tin Plated

    **C.** RJ45 & RJ31X Jack/Socket:

       1.     Housing: PBT + 15% Fiber Glass

       2.     Contact: Phosphorous Bronze, 50µ" Gold Plated

    **D.** Wiring in accordance to T568A

**2.** Locking Button: Material: Nylon 6/6, UL 96V-0

**l**   888-ASK-4ICC   icc.com   csr@icc.com   **l**