

Singlewire Paging Adapter

The new CyberData **Singlewire Paging Adapter (SPA)** is for use with Singlewire's paging and emergency notification software InformaCast® or InformaCast CK.

The **Singlewire Paging Adapter** provides a direct connection to legacy analog paging systems enabling InformaCast paging events to be broadcast. The on-board relay can be controlled using InformaCast GPI/O commands or can be set to activate when a page has begun.



Features

- InformaCast
- HTTP web interface and setup
- Built-in diagnostics
- 600 Ohm balanced audio out
- Unbalanced line-out
- 10/100 802.3af PoE

Specifications


Protocol	InformaCast V4.0 and later
Ethernet I/F	10/100 Mbps
Power Input	PoE 802.3af or 48VDC
Operating Temperature	-10° C to 50° C (14° F to 122° F)
Payload Types	G711
Regulatory Compliance	FCC Class A, UL 60950
Page Port Output	Balanced 600 Ohm 5VPP

Line Out:

Output Signal Amplitudes	2.0 VPP maximum
Output Level	+2dBm nominal
Total Harmonic Distortion	0.5% maximum
Output Impedance	10k Ohm

Dimensions	6.11" L x 4.05" W x 1.15" H
Warranty	2 years limited
Boxed Weight	1.8 lbs.
Part Number	011280

Singlewire Paging Adapter

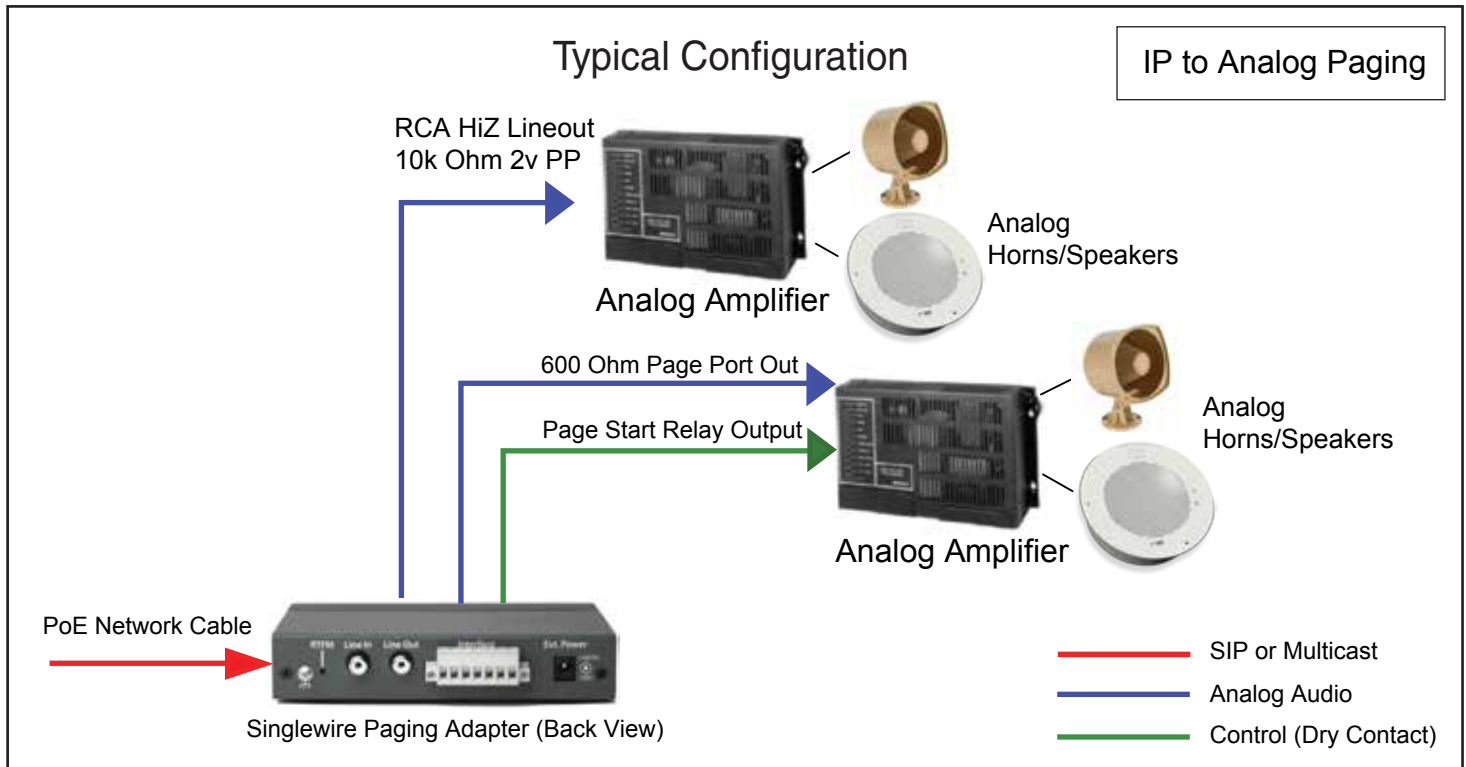

Connections

Pin/Description

- 1-Not Used
- 2-Not Used
- 3-Positive 600-Ohm Audio Output
- 4-Negative 600-Ohm Audio Output
- 5-Audio Ground Reference
- 6-Relay Contact - Common
- 7-Relay Contact - Normally Open

