


6P4C Line Cord, Pin 2-5

PRODUCT SPECIFICATION

Package includes:

A.6P4C Line Cord, 1 pc

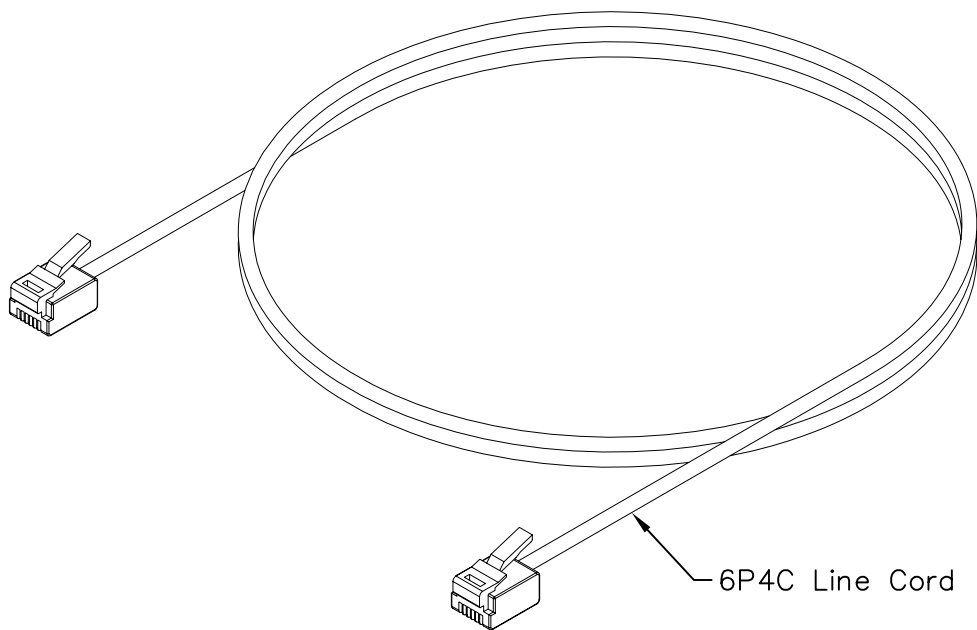


Features and Benefits:

- Flat 6P4C line cord designed for all voice connectivity applications
- Used with IC1076 voice modules, IC107C6 6P6C RJ-11 coupler modules, and/or ICMA267, ICMA330, & ICMA350 6P6C modular couplers
- Available in 7, 14, and 25 FT
- Available in silver satin
- UL listed

LINE CORD, 6P4C, PIN 2-5			 <i>PremiumProducts</i> <i>ProvenPerformance</i> <i>CompetitivePrices</i>
ITEM NO.	ICLC4XXFSV	REV.	B
DWG NO.	PSLC400FSV	PAGE NO.	1

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com

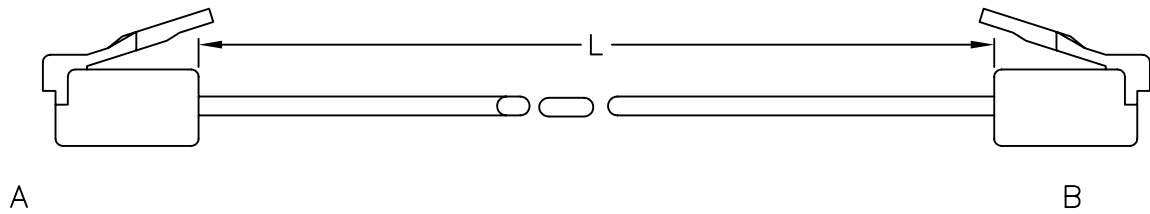

NOTE: UNLESS OTHERWISE SPECIFIED

1. ELECTRICAL/PHYSICAL:

A. TELEPHONE CORD:

- RESISTANCE OF CONDUCTOR: 148 OHMS/KM MAX AT 20°C
- RESISTANCE OF INSULATION: 100 MOHMS/KM MIN AT 20°C
- DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC
- TEMPERATURE AND VOLTAGE RATING: 60°C, 150V

B. MODULAR PLUG:

- UL APPLICATIONS: 250 VOLTS AC MAX, AT 2 AMPS MAX
- RESISTANCE OF INSULATION: 500 MOHMS
- RESISTANCE OF TERMINATION: 35 MILLIOHMS MAX AFTER 20°C
- DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC

2. MECHANICAL:

A. CABLE-TO-PLUG TENSILE STRENGTH: 20 LBS [89N] MIN

B. DURABILITY: 200 MATING CYCLES MIN

3. MATERIAL & FINISH:

A. TELEPHONE CORD: UL STYLE 20251, CSA II A/B

-JACKET:

- MATERIAL: FR-PVC, FLAT
- OVERALL DIAMETER: 0.0945"x0.2756"±0.00394"
- AVERAGE THICKNESS: 0.0200"
- MINIMUM THICKNESS: 0.0162"

-INSULATION:

- MATERIAL: PP
- OVERALL DIAMETER: 0.0374"±0.00197"
- AVERAGE THICKNESS: 0.0071"
- MINIMUM THICKNESS: 0.00512"

-CONDUCTOR: 26 AWG (7X34) COPPER WIRE, STRANDED

B. MODULAR PLUG: UL AND cUL RECOGNIZED

- HOUSING: PC, UL 94V-2
- COLOR: CLEAR
- CONTACT: HIGH STRENGTH COPPER ALLOY
GOLD PLATING OVER 100 MICRO INCH NICKEL
- GOLD PLATING: 1,27 MICRONS/50 MICRO INCH MIN ON CONTACTS
- NO. OF CONTACTS: 4

4. LENGTH: XX: 07-7 FT, 14-14 FT, & 25-25 FT

WIRING DIAGRAM:

PLUG A	PLUG B	COLOR
2	5	BLACK
3	4	RED
4	3	GREEN
5	2	YELLOW

ITEM NO.	LENGTH
ICLC407FSV	7' ± 1.0"
ICLC414FSV	14' ± 1.5"
ICLC425FSV	25' ± 2.0"

UL US FILE NO. 125268

LINE CORD, 6P4C, PIN 2-5				 PremiumProducts ProvenPerformance CompetitivePrices
ITEM NO.	ICLC4XXFSV	REV.	B	
DWG NO.	PSLC400FSV	PAGE NO.	2	

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd., La Mirada, CA 90638 * www.icc.com