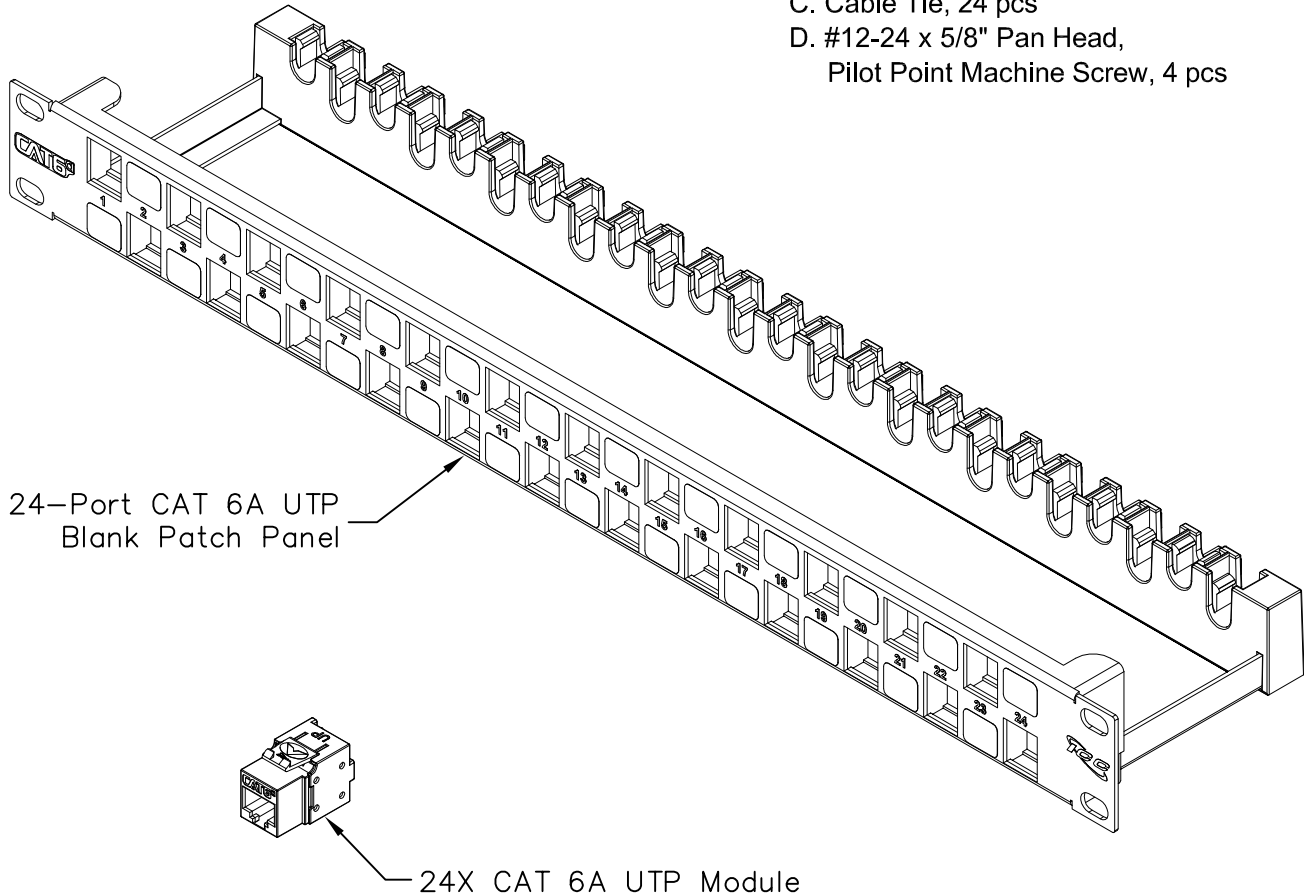


24-Port CAT 6A UTP Blank Patch Panel w/24 CAT 6A Inserts

PRODUCT SPECIFICATION

Package includes:

- A. 24-Port CAT6A UTP Blank Patch Panel, 1 pc
- B. CAT 6a, UTP, Modular Insert, 24 pcs
- C. Cable Tie, 24 pcs
- D. #12-24 x 5/8" Pan Head,
Pilot Point Machine Screw, 4 pcs



Features and Benefits:

- Accommodates ICC CAT6A UTP Modular Connector
- Designed to minimize the alien crosstalk for 10G applications
- Includes rear cable management to facilitate proper bend radius of cable
- Compatible with standard 19" distribution racks

PATCH PANEL,CAT 6A, 24-P,1RMS			 <i>Premium Products</i> <i>Proven Performance</i> <i>Competitive Prices</i>
ITEM NO.	ICMPP246AU	REV.	
DWG NO.	PSMPP246AU	PAGE NO.	

CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd, La Mirada, CA 90638 * Phone 562-356-3111 * Fax 562-356-3100 * www.icc.com

NOTE: UNLESS OTHERWISE SPECIFIED**1. 24-PORT PATCH PANEL:**

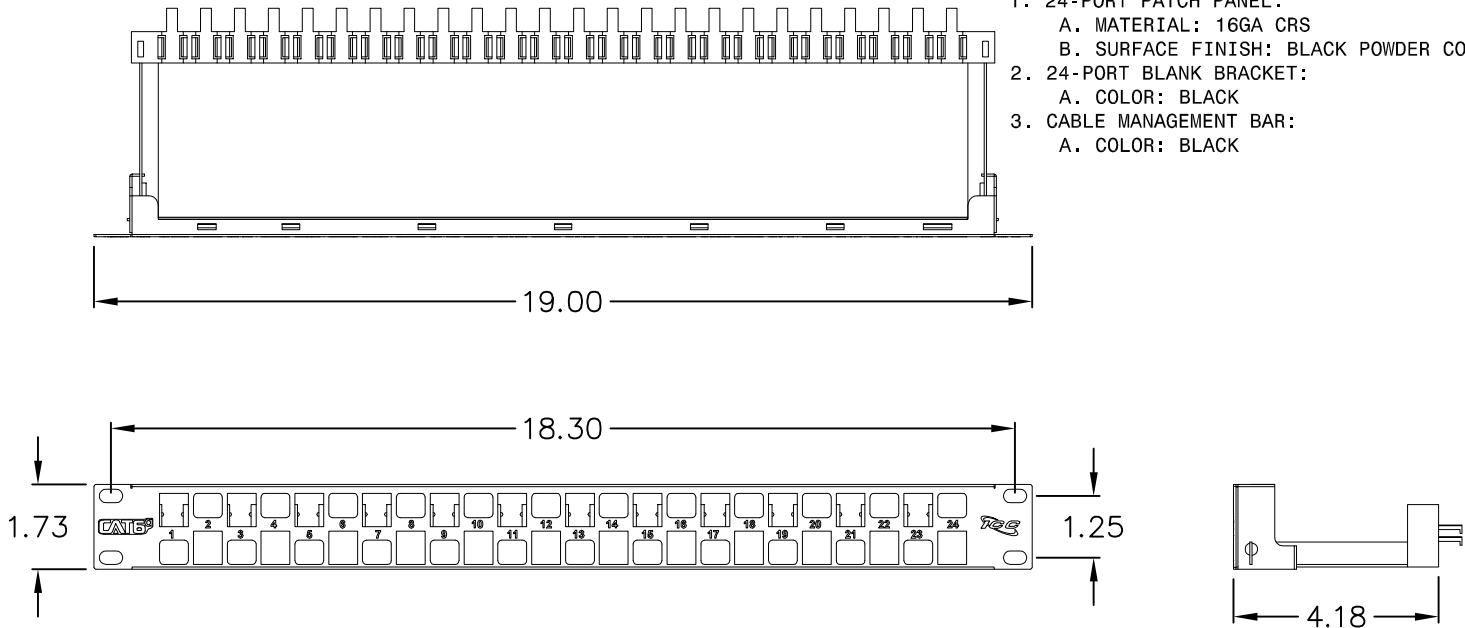
- A. MATERIAL: 16GA CRS
B. SURFACE FINISH: BLACK POWDER COAT

2. 24-PORT BLANK BRACKET:

- A. COLOR: BLACK

3. CABLE MANAGEMENT BAR:

- A. COLOR: BLACK

**NOTE: UNLESS OTHERWISE SPECIFIED****1. CERTIFICATION:**

- A. MEETS ANSI/TIA-568-C.2 (500MHz)

2. ENVIRONMENTAL CONDITION:

- A. STORAGE: -40 TO +70° C
B. OPERATION: -10 TO +60° C

3. ELECTRICAL:

- A. ELECTRICAL INSULATION RESISTANCE: 500 MΩ MIN @ 100V DC
B. DIELECTRIC WITHSTANDING VOLTAGE: 1000V DC OR AC PEAK CONTACT TO CONTACT @ 60Hz FOR 1 MINUTE
C. SPRING WIRE CONTACT RESISTANCE: 20 MΩ MAX.
D. IDC CONTACT RESISTANCE: 2.5 MΩ MAX.

4. MECHANICAL:

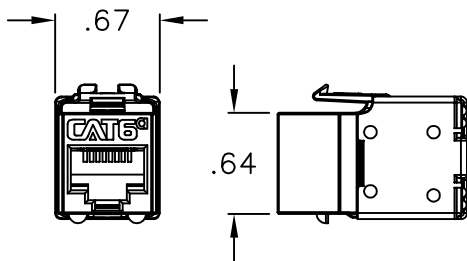

- A. RETENTION: 50N (11 LBF) FOR 60s +/-5s
B. INSERTION/EXTRACTION LIFE: 750 CYCLES MIN.

5. CAT 6A MODULE:**A. MATERIAL:**

- HOUSING: HIGH-IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
-IDC HOUSING: HIGH-IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
-IDC CONTACT: PHOSPHOR BRONZE ALLOY WITH 100μ, 100% SN ALLOY
-WIRE GAUGE: 23~24 AWG SOLID WIRE
-SPRING WIRE: PHOSPHOR BRONZE ALLOY PLATED WITH 50μ GOLD OVER 70~100μ NICKEL

6. SHIELDED WIRE CAP:

- A. MATERIAL: HIGH-IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0

**PATCH PANEL, CAT 6A, 24-P, 1 RMS**

ITEM NO. ICMPP246AU
DWG NO. PSMPP246AU

REV. A
PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd, La Mirada, CA 90638 * Phone 562-356-3111 * Fax 562-356-3100 * www.icc.com