


Category 6A 650MHz UTP CMP Solid Copper Cable

PRODUCT SPECIFICATION

Package includes:

A. Category 6A UTP CMP Solid Copper Cable, 1000 ft/reel

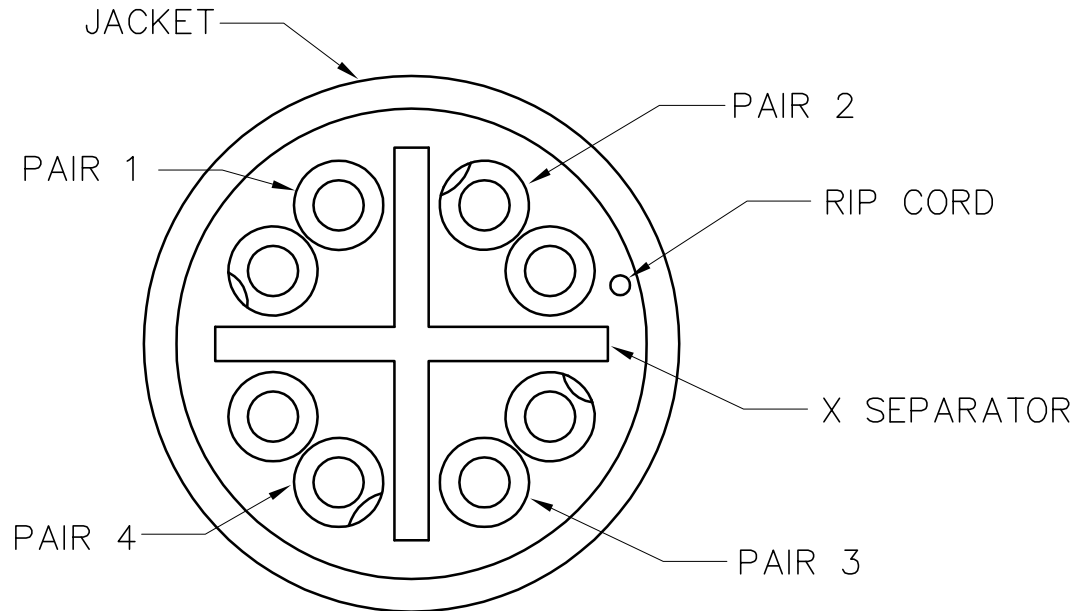

PAIR 1: BLUE & WHITE/BLUE

PAIR 2: ORANGE & WHITE/ORANGE

PAIR 3: GREEN & WHITE/GREEN

PAIR 4: BROWN & WHITE/BROWN

Features and Benefits:

- Complies with IEEE 802.3an 10G BASE-T and TIA-568-C.2 standards.
- Easy to dispense cable with reel design, saving your time and energy on the job site.
- Convenient sequential footage markings for usage tracking.
- Commercial / Flame rated required in most commercial installations.
- ETL verified TIA/EIA 568-C.2 for maximum performance.
- UL listed.

CABLE, CAT6A, UTP, 23AWG, 4P, CMP, 1000ft

ITEM NO. ICCABP6A00

REV. B

DWG NO. PSCABP6A00

PAGE NO. 1



CUSTOMER CARE / TECHNICAL SUPPORT * CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd, La Mirada, CA 90638 * www.icc.com

CATEGORY 6A 650MHz UTP CABLE ELECTRICAL PERFORMANCE (100 METER/328 FT)

FREQ. (MHz)	INSERTION LOSS, MAX. (dB/100M)	RETURN LOSS MIN. (dB/100M)	NEXT MIN. (dB/100M)	PS NEXT MIN. (dB/100M)	ACRF MIN. (dB/100M)	PS ACRF MIN. (dB/100M)	PROPAGATION DELAY MAX. (dB/100M)	ALIEN CROSSTALK	
								PS ANEXT MIN (dB/100M)	PS AACRF MIN (dB/100M)
1.0	2.1	20.0	78.3	76.3	71.8	68.8	570.0	67.0	67.0
4.0	3.8	24.2	69.3	67.3	59.8	56.8	552.0	67.0	66.2
8.0	5.3	26.3	64.8	62.8	53.7	50.7	546.7	67.0	60.1
10.0	5.9	27.0	63.3	61.3	51.8	48.8	545.4	67.0	58.2
16.0	7.5	27.0	60.2	58.2	47.7	44.7	543.0	67.0	54.1
20.0	8.4	27.0	58.8	56.8	45.8	42.8	542.0	67.0	52.2
25.0	9.4	26.3	57.3	55.3	43.8	40.8	541.2	67.0	50.2
31.25	10.5	25.6	55.9	53.9	41.9	38.9	540.4	67.0	48.3
62.5	15.0	23.5	51.4	49.4	35.9	32.9	538.6	65.6	42.3
100.0	19.1	22.1	48.3	46.3	31.8	28.8	537.6	62.5	38.2
155.0	24.1	20.8	45.4	43.4	28.0	25.0	536.9	59.6	34.4
200.0	27.6	20.0	43.8	41.8	25.8	22.8	536.5	58.0	32.2
250.0	31.1	19.3	42.3	40.3	23.8	20.8	536.3	56.5	30.2
300.0	34.3	18.8	41.1	39.3	22.3	19.3	536.1	55.3	28.7
350.0	37.2	18.3	40.1	38.1	20.9	17.9	535.9	54.3	27.3
400.0	40.1	17.9	39.3	37.3	19.8	16.8	535.8	53.5	26.2
500.0	45.3	17.5	37.8	35.8	17.8	14.8	535.6	52.0	24.2
550.0*	47.7	17.2	37.2	35.2	—	—	—	—	—
600.0*	50.1	16.9	36.6	34.6	—	—	—	—	—
650.0*	52.3	16.7	36.1	34.1	—	—	—	—	—

*FREQUENCIES ARE FOR REFERENCE ONLY

NOTES: UNLESS OTHERWISE SPECIFIED

1. DESCRIPTION
 - A. RATED TEMPERATURE: 75°C
 - B. FLAME TEST: FT6
2. ELECTRICAL PROPERTIES:
 - A. CONDUCTOR DCR: 9.38 OHMS/100M @20°C
 - B. DCR UNBALANCE: 3% MAX
 - C. CAPACITANCE UNBALANCE PAIR/GROUND: 330°F/100M MAX
 - D. INPUT IMPEDANCE: 100 OHMS±10% (10-550MHz)
 100 OHMS±12% (1-100MHz)
 100 OHMS±15% (>100-350MHz)
 100 OHMS±22% (>350MHz)
 - E. PROPAGATION DELAY SKEW: 25 ns/100M MAX
 - F. NOMINAL VELOCITY OF PROPAGATION (NVP): 70%
 - G. INSTALLATION TEMPERATURE: 32°~140°F
 - H. OPERATIONAL TEMPERATURE: -4°~167°F
3. PERFORMANCE:
 - A. SEE TABLE ABOVE
4. PRODUCT STANDARD CERTIFICATION:
 - A. IEEE 802.3an 10G BASE-T
 - B. TIA-568-C.2
 - C. UL
 - D. ETL
5. BEND RADIUS: 1.34"
6. CABLE COLOR: XX = BL-BLUE, WH-WHITE
7. PACKAGING:
 - A. BULK PACKAGE: 1000 FT/REEL
 - B. REEL SIZE: 17.3W X 13.0H
 - C. WEIGHT: 57.5 LBS

CABLE CONSTRUCTION		
CONDUCTOR	SIZE	CMP 23AWG x 4P
	CONSTRUCTION	SOLID BARE COPPER
SEPARATOR	MATERIAL	FEP
INSULATION	MATERIAL	FEP
JACKET	DIAMETER	0.34"
	MATERIAL	LOW SMOKE, FLAME RETARDANT PVC

PART NUMBER	DESCRIPTION
ICCABP6ABL	CAT6A 650MHz UTP SOLID CABLE, 23 AWG, 4 PAIR, CMP, 1000FT, BLUE
ICCABP6AWH	CAT6A 650MHz UTP SOLID CABLE, 23 AWG, 4 PAIR, CMP, 1000FT, WHITE



FILE NO. 320548

CABLE, CAT6A, UTP, 23AWG, 4P, CMP, 1000ft

ITEM NO.	ICCABP6A00	REV.	B
DWG NO.	PSCABP6A00	PAGE NO.	2



CUSTOMER CARE / TECHNICAL SUPPORT *CSR@ICC.COM / 888-ASK-4-ICC (275-4422) * 14700 Alondra Blvd, La Mirada, CA 90638 *www.icc.com