





GXV-WM Wall Mount Accessory Kit

To install the top mount attachment, follow these steps:

1. Unscrew the 3 screws that secure the dome cover using the hexagonal wrench included in the GXV-3662 package.
2. Align the top mount attachment holes with the 3 holes on the bottom of the GXV-3662.
3. Screw in and tighten the 3 screws supplied with its washers.
4. Replace the dome cover and screw it in again using the hexagonal wrench.

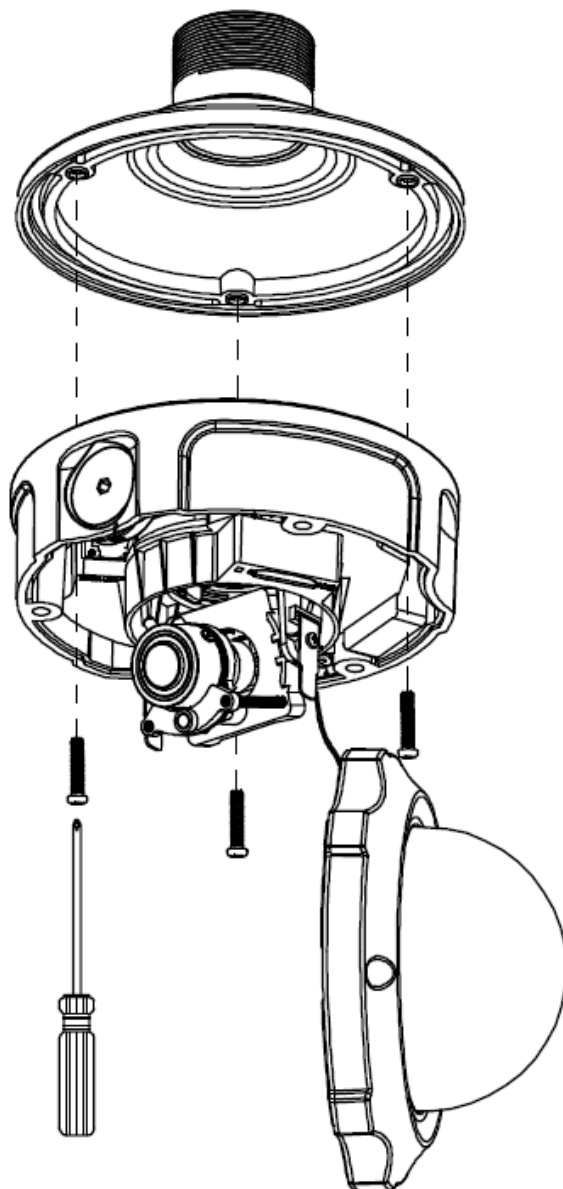

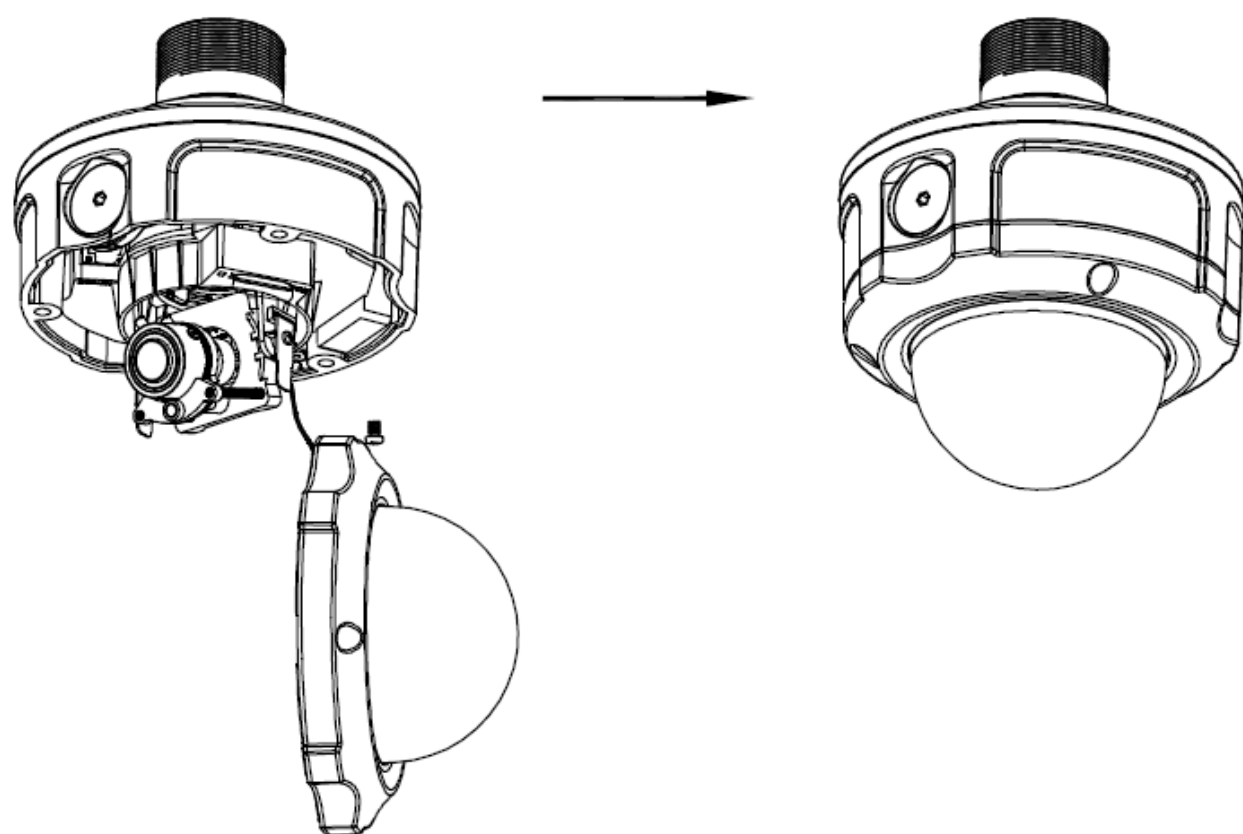

5. Next, screw in the top mount attachment to the wall bracket. You can apply some oil or grease to make this process easier
6. Next, insert the small screw on the side to secure the top mount attachment in place.
7. It is recommended to use silicone to waterproof all gaps.

